

# Rolls

## FLOODED DEEP CYCLE BATTERIES

### S-140

**12 VOLTS**

CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Universal terminal
HANDLES:	Integrated top cover

WEIGHT DRY:	19 kg	41 Lbs.
WEIGHT WET:	24 kg	54 Lbs.
LENGTH:	321 mm	12 5/8 Inches
WIDTH:	171 mm	6 3/4 Inches
HEIGHT:	238 mm	9 3/8 Inches

6 Cell




COLD CRANK AMPS (CCA):	0°F / -17.8°C	650
MARINE CRANK AMPS (MCA):	32°F / 0°C	845
RESERVE CAPACITY (RC @ 25A):		170 Minutes

### CAPACITY **105 AH**

HOUR RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	140	1.40
<b>@ 20 HOUR RATE</b>	<b>1.280</b>	<b>105</b>	<b>5.25</b>
@ 15 HOUR RATE	1.280	99	6.60
@ 12 HOUR RATE	1.280	93	7.75
@ 10 HOUR RATE	1.280	89	8.90
@ 8 HOUR RATE	1.280	87	10.88
@ 6 HOUR RATE	1.280	86	14.33
@ 5 HOUR RATE	1.280	85	17.00
@ 4 HOUR RATE	1.280	68	17.00
@ 3 HOUR RATE	1.280	62	20.67
@ 2 HOUR RATE	1.280	54	27.00
@ 1 HOUR RATE	1.280	38	38.00

### CYCLE LIFE VS. DEPTH OF DISCHARGE

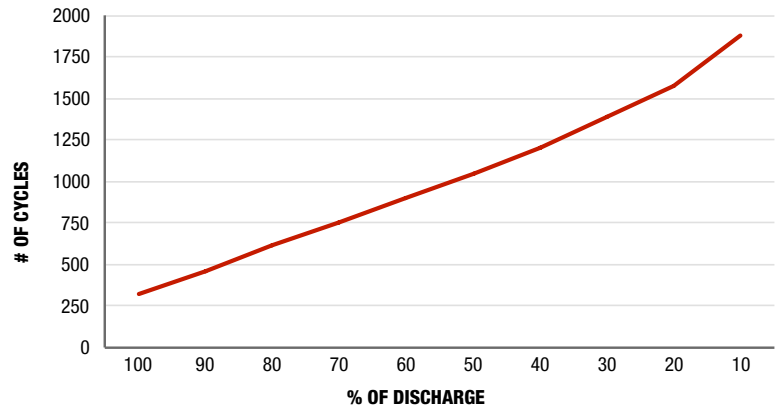

### VOLTAGE VS. DEPTH OF DISCHARGE

