

# Rolls

**S2-3220GEL**  
2V 3220 AH @C20

**TUBULAR POSITIVE - OPzV - VALVE REGULATED GEL BATTERY**



**Rolls**  
BATTERY ENGINEERING  
BY SURRETTE BATTERY COMPANY

SAI GLOBAL  
ISO 9001  
Quality

**CONSTANT CURRENT DISCHARGE**

CUT OFF VOLTAGE V/CELL	30M	1HR	2HR	3HR	5HR	6HR	8HR	10HR	20HR
1.6V	2775	1896	1149	825	531	477	364	315	165

**SPECIFICATIONS**


Nominal Voltage		2 Volt
Rated Capacity (20 hour rate)		3220 AH
Dimensions	Total Height (including terminals)	807mm / 31.77"
	Length	576mm / 22.68"
	Width	212mm / 8.35"
	Weight	496.04 lbs / 225.0 Kg




**CHARACTERISTICS**

Capacity 77°F (25°C)	100 Hour Rate	3750 AH
	20 Hour Rate	3220 AH
	10 Hour Rate	3000 AH
Internal Resistance	Full charged Battery 77°F (25°C)	0.19mΩ
Capacity Affected by Temperature (20hr rate)	104°F (40°C)	105%
	77°F (25°C)	100%
	32°F (0°C)	89%
	5°F (-15°C)	79%
Self-Discharge	Less than 2% per month at 77°F (25°C)	
Max Discharge 77°F (25°C)	12000A (5s)	
Terminal	Standard	Thread insert & Bolt (F10-M8)
Float Charging Voltage Range	2.25 to 2.3 VDC/unit Average at 25°C	
Max Charge Current	600 Amps	

**CYCLE LIFE**

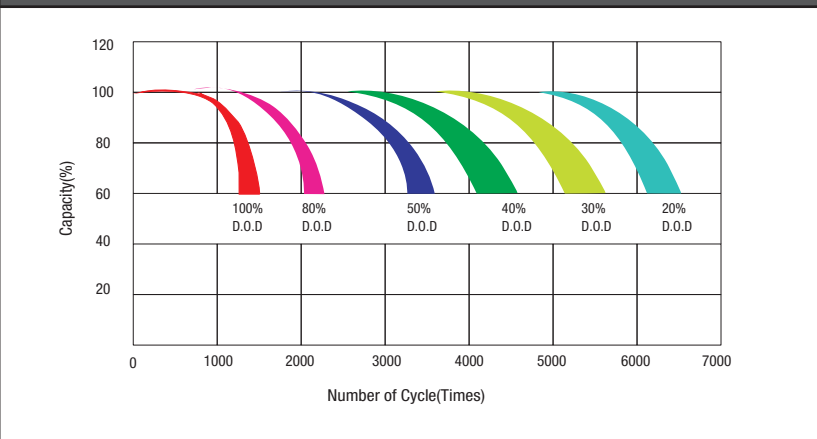

**SIZE & DETAILED ILLUSTRATION**

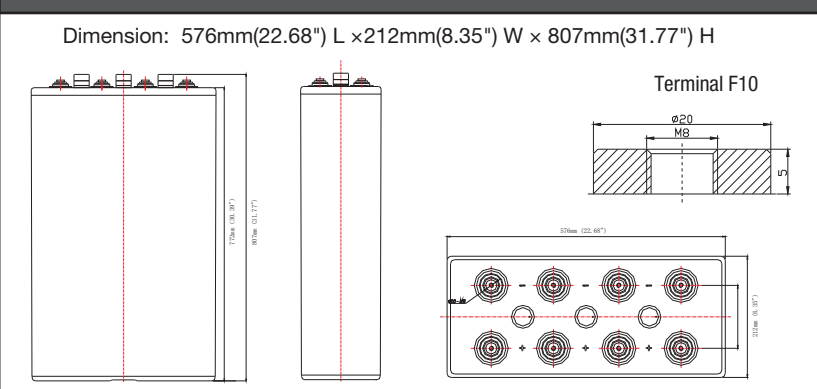

**TEMP EFFECTS ON LIFE AT FLOAT CHARGE**

