

# ET MODULE

## ET-M53605

ET-M53605 series offers high power performance for Off-grid PV systems and withstands extreme operating conditions. The modules are produced on a high quality production line, operated by well-trained employees.




	Module
Length	401 mm
Width	176 mm
Height	34 mm
Weight	1.2 kg



# ET MODULE

## ET-M53605

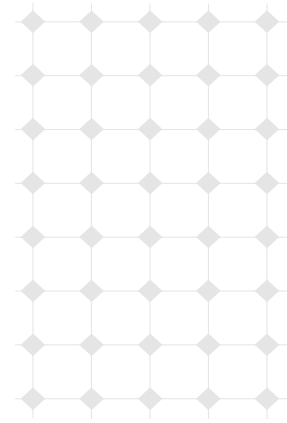

### Performance under standard test conditions (STC)

Peak power (Pmax)	5 W
Maximum power point voltage (Vmpp)	18 V
Maximum power point current (Impp)	0.29 A
Open circuit voltage (Voc)	21.96 V
Short circuit current (Isc)	0.326 A

( voltage±2 current±0.4)

### System design characteristics

Maximum system voltage	715 V
Reverse current load	Do not apply external voltages in excess of Voc to the module.

Minor reduction in efficiency under partial load conditions at 25° C at 200W/m<sup>2</sup>, 95 % (+/- 3 %) of the STC efficiency (1000 W/m<sup>2</sup>) is achieved.

### Component materials

Cells per module	36
Solar cells	monocrystalline silicon
Cell dimensions	125 mm square

### Thermal characteristics

NOCT	46 °C
TK Isc	0.08 %/K
TK	Voc -0.33 %/K

### Rated power and maximum tolerance

Rated power 5 Wp	+/- 5 %
Module Efficiency	>7 %

## PHYSICAL CHARACTERISTICS

