



ET MODULE

ET-M53675

ET-M53675 series offers high power performance for Off-grid PV systems and withstands extreme operating conditions. The modules are produced on a high quality production line, operated by well-trained employees.




	Module
Length	1217 mm
Width	555 mm
Height	36 mm
Weight	8.2 kg



ET MODULE

ET-M53675

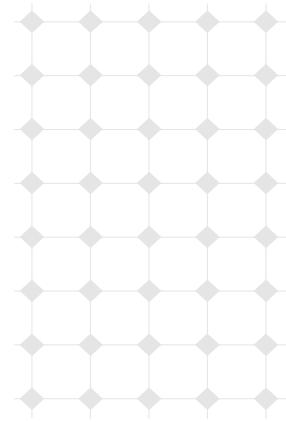

Performance under standard test conditions (STC)

Peak power (Pmax)	75W
Maximum power point voltage (Vmpp)	17.40V
Maximum power point current (Impp)	4.31A
Open circuit voltage (Voc)	21.73V
Short circuit current (Isc)	4.72A

(voltage \pm 2 current \pm 0.4)

System design characteristics

Maximum system voltage	715 V
Reverse current load	Do not apply external voltages in excess of Voc to the module.

Minor reduction in efficiency under partial load conditions at 25°C at 200W/m², 95 % (+/- 3 %) of the STC efficiency (1000 W/m²) is achieved.

Component materials

Cells per module	36
Solar cells	monocrystalline silicon
Cell dimensions	125 x 125 mm

Thermal characteristics

NOCT	46 °C
TK Isc	0.08 %/K
TK	Voc -0.33 %/K

Rated power and maximum tolerance

Rated power 75 Wp	+/- 5 %
Module Efficiency	>11.5 %

PHYSICAL CHARACTERISTICS

