

# PS150 C-SJ5-8

## Solar Submersible Pump System for 4" wells

### System Overview

Head	max. 20 m
Flow rate	max. 4.6 m <sup>3</sup> /h

### Technical Data

#### Controller PS150

- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

Power	max. 0.30 kW
Input voltage	max. 50 V
Optimum Vmp*	> 17 V
Nominal voltage (battery operation)	12 V & 24 V**
Motor current	max. 18 A
Efficiency	max. 98 %
Ambient temp.	-30...50 °C
Enclosure class	IP54

#### Motor ECDRIVE 150-C

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

Rated power	0.30 kW
Efficiency	max. 92 %
Motor speed	600...3,300 rpm
Insulation class	F
Enclosure class	IP68
Submersion	max. 250 m


#### Pump End PE C-SJ5-8

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Optional: dry running protection
- Centrifugal pump

#### Pump Unit PU C-SJ5-8 (Motor, Pump End)

Borehole diameter	min. 4,0 in
Water temperature	max. 50 °C

### Standards



Meets the requirements of:  
IEC/EN 61702:1995,  
IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m<sup>2</sup> solar irradiance, 25 °C cell temperature

\*\*Reduced flow rate. Please refer to the pump characteristic chart in COMPASS.




## PS150 C-SJ5-8

Solar Submersible Pump System for 4" wells

### Pump Chart



Vmp\* > 17 V

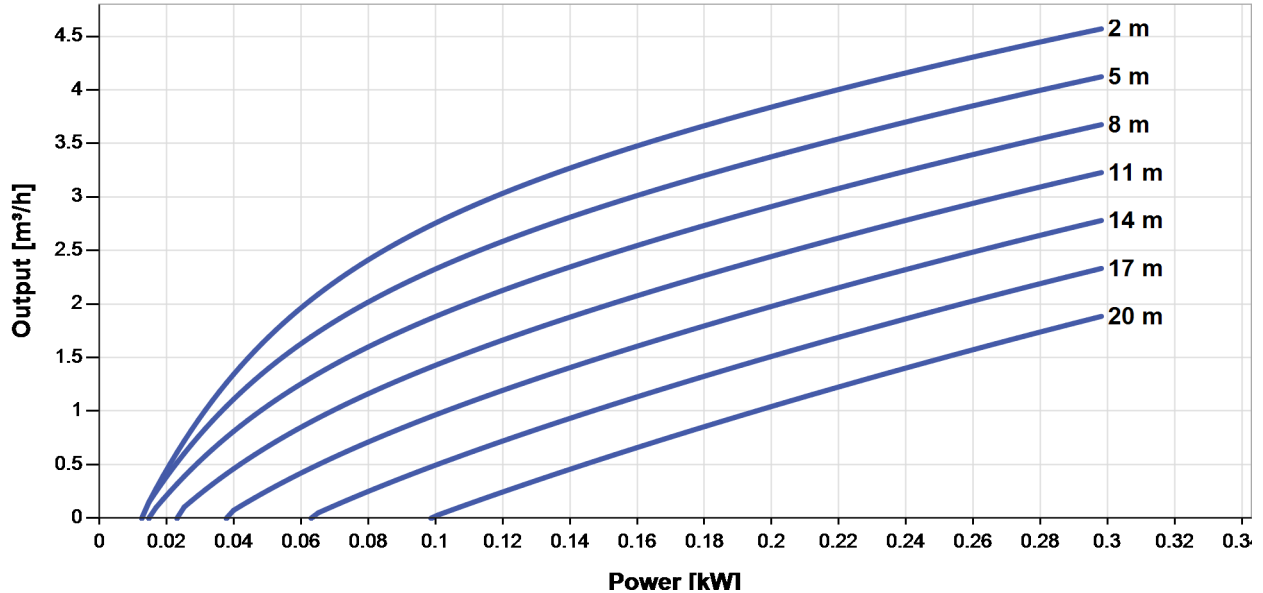

### Dimensions and Weights


#### Controller

H = 276 mm  
 H1 = 248 mm  
 H2 = 208 mm  
 W = 225 mm  
 W1 = 188 mm  
 D = 108 mm  
 D1 = 100 mm



#### Pump Unit

A = 524 mm  
 B = 185 mm  
 C = 339 mm  
 D = 96 mm  
 E = 98 mm  
 S = 1.5 in

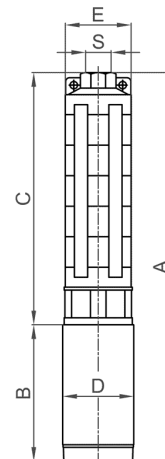

	Net weight
Controller	1.2 kg
Pump Unit	11 kg
Motor	7.0 kg
Pump End	4.2 kg

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

