

PS2-600 HR-03H

Solar Submersible Pump System for 4" wells

System Overview

 Head
 max. 180 m

 Flow rate
 max. 0,45 m³/h

Technical Data

Controller PS2-600

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

 Power
 max. 0,70 kW

 Input voltage
 max. 150 V

 Optimum Vmp**
 > 68 V

 Motor current
 max. 13 A

 Efficiency
 max. 98 %

 Ambient temp.
 -40...50 °C

 Enclosure class
 IP68

Motor ECDRIVE 600-HR

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

 Rated power
 0,7 kW

 Efficiency
 max. 92 %

 Motor speed
 900...3.300 rpm

 Insulation class
 F

 Enclosure class
 IP68

 Submersion
 max. 150 m

Pump End PE HR-03H***

- Non-return valve
- Premium materials, stainless steel: AISI 304/316
- Optional: dry running protection
- Helical rotor pump



Pump Unit PU600 HR-03H (Motor, Pump End)

Borehole diameter min. 4,0 in Water temperature max. 50 °C

Standards

 ϵ

2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

***Specify temperature range on order








PS2-600 HR-03H

Solar Submersible Pump System for 4" wells


Pump Chart Vmp* > 68 V

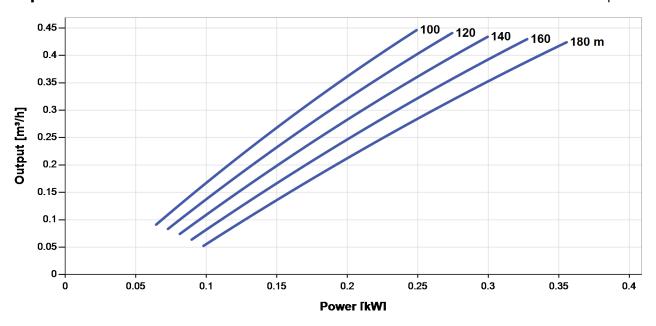

Dimensions and Weights




H1 = 352 mm H2 = 333 mm W1 = 207 mm W2 = 170 mm W3 = 164 mm D1 = 124 mm



Pump Unit

A = 780 mm B = 185 mm C = 595 mm D = 96 mm S = 1,25 in



	Net weight
Controller	5,6 kg
Pump Unit	11 kg
Motor	7,0 kg
Pump End	4,2 kg

^{*}Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

BERNT LORENTZ GmbH & Co. KG

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de



