

PS600 HR-04

Solar Submersible Pump System for 4" wells

System Overview

max. 70 m Flow rate max. 0.72 m³/h

Technical Data

Controller PS600

- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

Power	max. 0.70 kW
Input voltage	max. 150 V
Optimum Vmp*	> 68 V
Nominal voltage (battery operation)	48 V
Motor current	max. 13 A
Efficiency	max. 98 %
Ambient temp.	-3050 °C
Enclosure class	IP54

Motor ECDRIVE 600-HR

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

0.70 kW Rated power Efficiency max. 92 % Motor speed 900...3,300 rpm Insulation class F Enclosure class IP68 Submersion max. 250 m

Pump End PE HR-04**

- Non-return valve
- Premium materials, stainless steel: AISI 304/316
- Optional: dry running protection
- Helical rotor pump

Pump Unit PU HR-04 (Motor, Pump End)

Borehole diameter min. 4,0 in Water temperature max. 50 °C

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

Meets the requirements of: IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature







Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de




^{**}Specify temperature range on order



PS600 HR-04

Solar Submersible Pump System for 4" wells




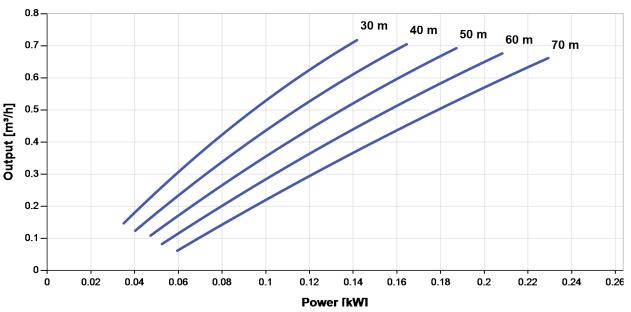


Dimensions and Weights

H = 396 mm H2 = 364 mm W1 = 178 mm W2 = 156 mmW3 = 116 mm D = 165 mmD1 = 150 mm

Controller






A = 780 mm B = 185 mm C = 595 mmD = 96 mm

S = 1.25 in

Pump Unit



	Net weight
Controller	4.5 kg
Pump Unit	11 kg
Motor	7.0 kg
Pump End	4.2 kg

^{*}Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature



Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de



