

PS9k2 C-SJ42-4

Solar Submersible Pump System for 6" wells

System Overview

Head max. 35 m Flow rate max. 72 m³/h

Technical Data

Controller PS9k2

- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)

 Power
 max. 10 kW

 Input voltage
 max. 850 V

 Optimum Vmp*
 > 575 V

 Motor current
 max. 17 A

 Efficiency
 max. 98 %

 Ambient temp.
 -30...50 °C

 Enclosure class
 IP54

Motor AC DRIVE SUB 6" 7.5kW

- Highly efficient 3-phase AC motor
- Frequency: 25...54 Hz
- Premium materials, stainless steel: AISI 304
- No electronics in the motor

 Motor speed
 1,400...3,080 rpm

 Power factor
 0.87

 Insulation class
 F

 Enclosure class
 IP68

 Submersion
 max. 300 m

Pump End PE C-SJ42-4

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Optional: dry running protection
- Centrifugal pump

Pump Unit PU C-SJ42-4 (Motor, Pump End)

Borehole diameter $$\rm min.~6,0~in$$ Water temperature $$\rm max.~30~^{\circ}C$$

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

Meets the requirements of: IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature





Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de






PS9k2 C-SJ42-4

Solar Submersible Pump System for 6" wells


Pump Chart Vmp* > 575 V

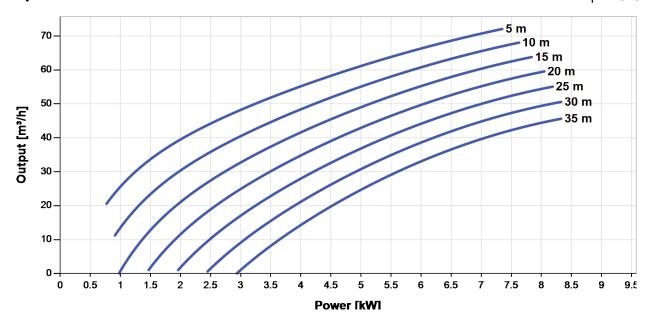

Dimensions and Weights


Controller

H = 500 mm H1 = 450 mm H2 = 425 mm W1 = 320 mm W2 = 290 mm D = 9.0 mm D1 = 220 mm D2 = 250 mm

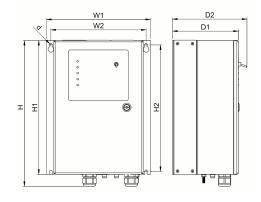

Pump Unit

A = 1,362 mm B = 645 mm C = 717 mm D = 144 mm E = 147 mm S = 3 in



	Net weight
Controller	17 kg
Pump Unit	68 kg
Motor	52 kg
Pump End	16 kg

 $^{{}^\}star Vmp: MPP\text{-}voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature to the conditions of t$

BERNT LORENTZ GmbH & Co. KG

Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de



