

Rolls

FLOODED DEEP CYCLE BATTERIES

31 M 120

12 VOLTS

CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Universal terminal
HANDLES:	Integrated top cover

WEIGHT DRY:	20 kg	45 Lbs.
WEIGHT WET:	27 kg	60 Lbs.
LENGTH:	321 mm	13 Inches
WIDTH:	171 mm	6 3/4 Inches
HEIGHT:	238 mm	9 3/8 Inches

6 Cell




COLD CRANK AMPS (CCA):	0°F / -17.8°C	750
MARINE CRANK AMPS (MCA):	32°F / 0°C	1000
RESERVE CAPACITY (RC @ 25A):		185 Minutes

CAPACITY **120 AH**

HOUR RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	160	1.60
@ 20 HOUR RATE	1.280	120	6.00
@ 15 HOUR RATE	1.280	113	7.53
@ 12 HOUR RATE	1.280	108	9.00
@ 10 HOUR RATE	1.280	101	10.10
@ 8 HOUR RATE	1.280	100	12.50
@ 6 HOUR RATE	1.280	98	16.33
@ 5 HOUR RATE	1.280	97	19.40
@ 4 HOUR RATE	1.280	88	22.00
@ 3 HOUR RATE	1.280	74	24.67
@ 2 HOUR RATE	1.280	64	32.00
@ 1 HOUR RATE	1.280	45	45.00

CYCLE LIFE VS. DEPTH OF DISCHARGE

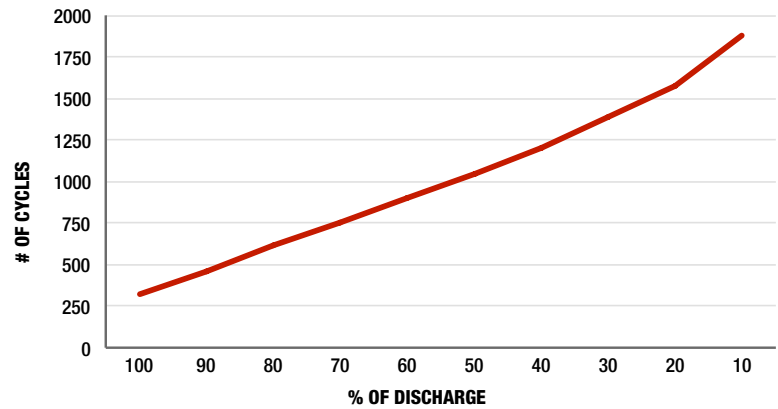

VOLTAGE VS. DEPTH OF DISCHARGE

