

PS2-1800 C-SJ12-4

Solar Submersible Pump System for 4" wells

System Overview

Head Flow rate

max. 18 m max. 20 m³/h

Technical Data

Controller PS2-1800

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- . Protected against reverse polarity, overload and overtemperature
- . Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect .

 Integrated Sun Sensor 	
Power	max. 1,8 kW
Input voltage	max. 200 V
Optimum Vmp**	> 102 V
Motor current	max. 14 A
Efficiency	max. 98 %
Ambient temp.	-4050 °C
Enclosure class	IP68

Motor ECDRIVE 1200-C / ECDRIVE 1800-C

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316

 No electronics in the motor 	
Rated power	1,7 kW
Efficiency	max. 92 %
Motor speed	9003.300 rpm
Insulation class	F
Enclosure class	IP68
Submersion	max. 150 m

Pump End PE C-SJ12-4

- Non-return valve
- · Premium materials, stainless steel: AISI 304
- Optional: dry running protection
- Centrifugal pump

Pump Unit PU1800 C-SJ12-4 (Motor, Pump End)

Borehole diameter min. 4,0 in Water temperature max. 50 °C

Standards




2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature



Created by LORENTZ COMPASS 3.1.0.100

BERNT LORENTZ GmbH & Co. KG

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.




Sun. Water. Life.




PS2-1800 C-SJ12-4

Solar Submersible Pump System for 4" wells

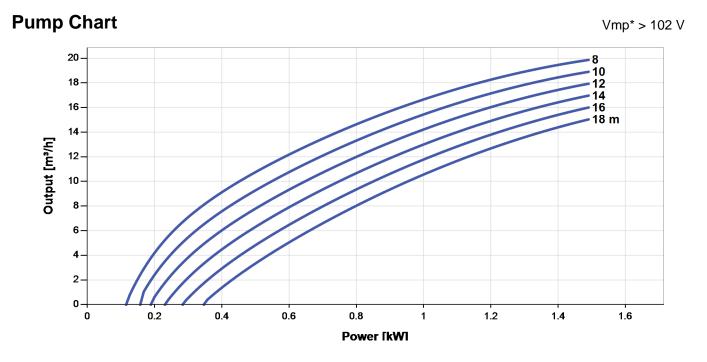

Dimensions and Weights

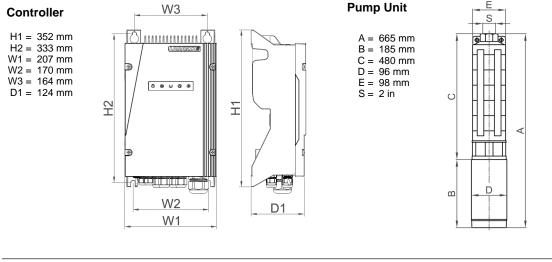

	Net weight
Controller	6,0 kg
Pump Unit	13 kg
Motor	7,0 kg
Pump End	6,0 kg

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

BERNT LORENTZ GmbH & Co. KG

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de



Created by LORENTZ COMPASS 3.1.0.100

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.